

# Eurolook

## Applications

The Eurolook transparent shutter is suited to shops, banks and museums, and similar sites where both security and transparency are essential.

## Curtain Slat

The curtain, made of synthetic links of polycarbonate, offers a transparency of 83% and allows 92% daylight transmission. UV-stabilised, it does not discolour or yellow. Eurolook Standard bends while effectively resisting cracking or breaking. The Eurolook shutter has obtained the security rating SKG Class 3 against European standard ENV 1627-1630. Tested to BS 476: Part 7 (1997), respecting the spread of flame across the surface of a material, achieving Class 1 rating. The shutter has also been awarded a Pass according to the Aerospace safety standard ABD0031 respecting smoke and toxic gas emissions. Eurolook Standard is available in transparent, frosted and ventilated variants, as well as in a transparent version with a coating against scratches and graffiti. Shutter can be upgraded to ram raid resistant classification.

Visible Face:	85mm
Profile Height:	108mm
Weight per m <sup>2</sup> :	9kg
Maximum Width:	12000mm (outboard motor) 7000mm (tubular motor)
Maximum Area:	29m <sup>2</sup> (tubular motor) 72m <sup>2</sup> (outboard motor, internal fit) 50m <sup>2</sup> (outboard motor, external fit)

## Housing

Not included as standard. Galvanised steel housing available on request, with option to powder coat any RAL / BS colour.

Guide Height (mm)	Plate Size (mm)	Motor
2750	305	Tubular
4000	355	Tubular
4500	400	Tubular
5000	400	Outboard
6000	450	Outboard
7000	550	Outboard

Plate sizes shown as a guide only and may vary.

## Bottom Slat

Anodised aluminium bottom rail with weather seal.

## Guide Channels

Extruded aluminium with a weather seal. Guide channel width of 80mm or 115mm, including PVC seal strip. Guide channels are either bolted onto angle or box section, or fixed directly to the opening, depending on the application.


Finish: Standard mill aluminium finish, powder coating available on request.

## Operation


**Electric:** Single-phase tubular motor with internal rocker or external key switch. Numerous options such as group or remote control etc., available as required. Manual override facility as required.

CE Compliant to all applicable directives and regulations.

## Front Face

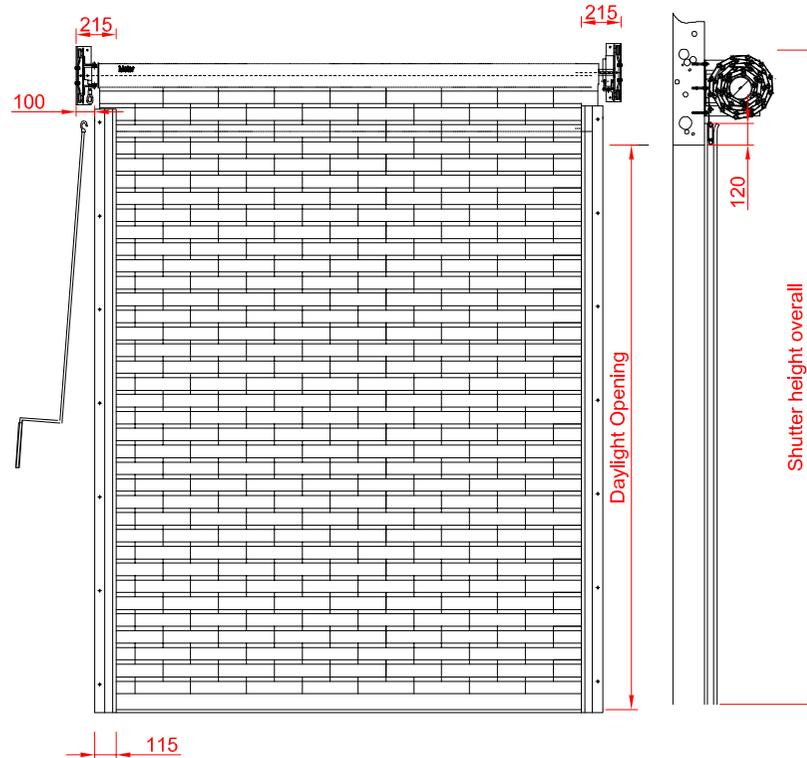


## Link Profile

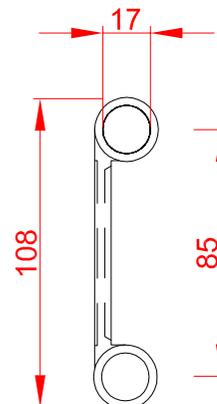


## Fixing Detail


### FACE FIX

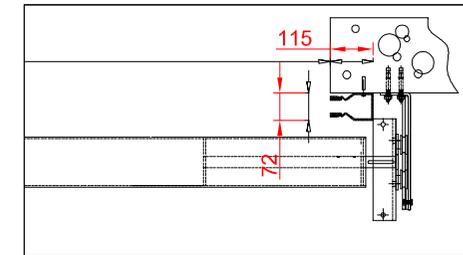

### REVEAL FIX



## Guide Channels

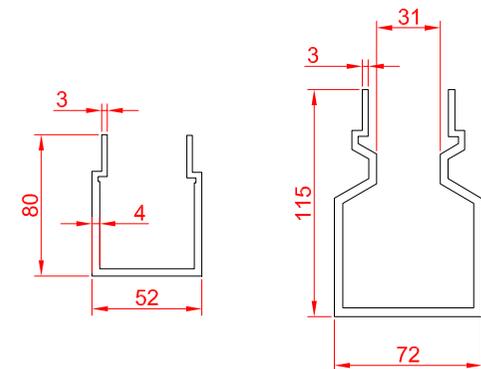

Unit 12, Artillery Business Park, Garrison Avenue,  
Park Hall, Oswestry, Shropshire SY11 4AD  
Phone: 01691 679257 | [www.aluroll.co.uk](http://www.aluroll.co.uk)